



WATER-FILLED ATTENUATOR



PLAN

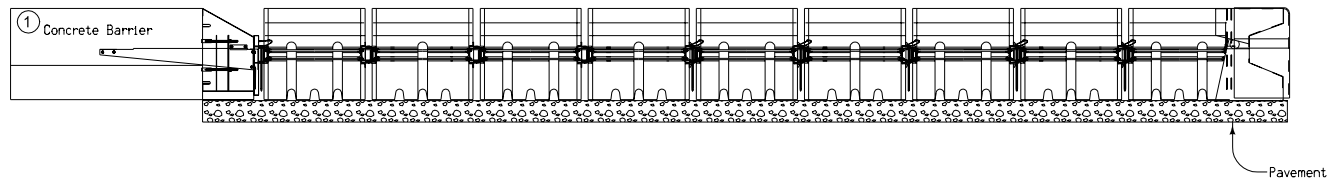

ELEVATION

When water-filled attenuators are exposed to cold temperatures, they shall contain anti-freeze according to the manufacturer's recommendations.

Approaching the work zone, a NCHRP Report 350, Test Level 3 (62 mph) unit shall be used. Contact the manufacturer for details.

Within the work zone, a 55 mph unit may be used. Contact the manufacturer for details.


Depending on how traffic is staged, the same temporary attenuator may be used at more than one location. Because of this, the total number of attenuators needed may be less than the number of locations tabulated.

Contract Item:

Temporary Attenuators, Non-Redirective (NR)

Tabulation: 108-30

- ① Water-filled attenuators shall only be used to shield a single full-shaped concrete barrier.

 Iowa Department of Transportation Highway Division	
STANDARD ROAD PLAN RE-85(2)	
REVISION: NEW. Replaces Standard Road Plan RE-73.	REVISION NO. NEW
<i>William J. Allen</i> APPROVED BY DESIGN METHODS ENGINEER	REVISION DATE 10-18-05
TEMPORARY ATTENUATORS NON-REDIRECTIVE (Sheet 2 of 2)	